
PRODUCT INFORMATION



REGUPOL CLIMB 77





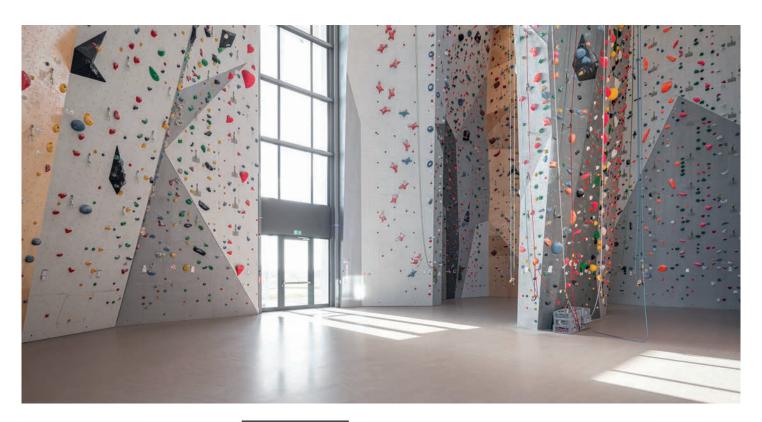

PRODUCT INFORMATION

REGUPOL CLIMB 77



Material composition:

Wear layer: approx. 2 mm polyurethane, seamless and with colour finish

First elastic layer: 30 mm composite foam with a higher density to absorb falls and increase the horizontal pressure distribution

Second elastic layer: 45 mm composite foam with a lower density for shock absorption

Areas of application:

Indoor climbing

Thickness:

approx. 77 mm

HIC:

approx. 2.80 m

Fire classification:

C.fl-s1

Slip resistance:

R 10

Advantages:

Seamless, easy to clean, durable and resilient

Colours

16 Basic colours, 16 special colours and 15 line colours.

Service:

Product sample service, individual worldwide consulting, external certification, internal quality certificates, lines and lettering.

Installation:

The transfer is carried out by **REGUPOL** fitters.


Standard colours for sports and climbing halls





REGUPOL CLIMB 77

Design colours for sports and climbing halls

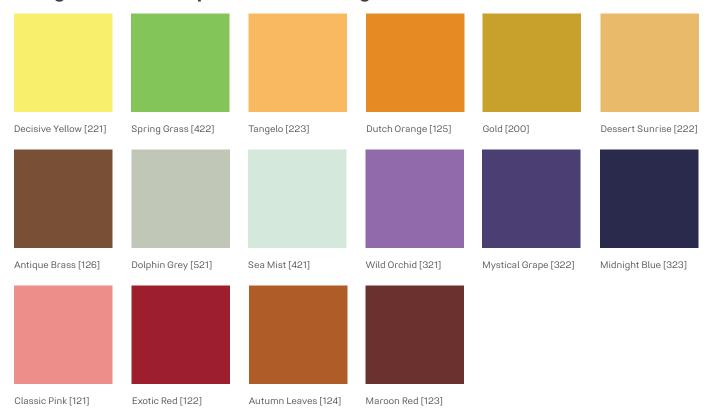

Line colours for sports and climbing halls

